

Minebea BCL3 GEARED MOTOR

NEW

Gear Unit : PG-22 Type



Metal gear

Gear ratio	Rated Load Torque	Max Torque	Dimension L	Efficiency
	mN · m	mN · m	mm	%
1/4	49	73.5	13.1	85
1/16	73.5	110.3	16.2	72
1/24	73.5	110.3	16.2	72
1/64	98	147	19.3	61
Plastic gear	98	147	19.3	61
Gear ratio	Rated Load Torque	Max Torque	Dimension L	Efficiency
	mN · m	mN · m	mm	%
1/4	24.5	39.2	13.1	85
1/16	34.3	58.5	16.2	72
1/24	34.3	58.8	16.2	72

■ 3 Phase outer rotor type DC Brushless Motor

BLDC motor : BCL3 Type




- Interface
 - Power Supply
 - GND
 - FG
 - VSP or PWM
 - CW / CCW switch
- Connection Connector



JST : BM05B-SRSS-TB
or
JCTC : 11002W00-5P-S

※ Adjustable by winding

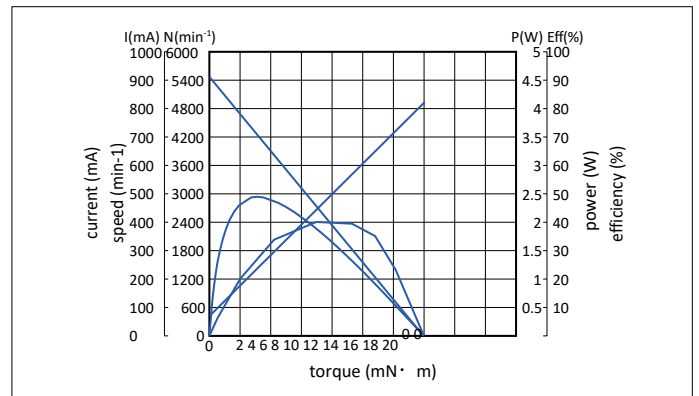

Outside Dimension (Reference)

