

Minebea BKL4 GEARED MOTOR

NEW


Gear Unit : ST-35 Type



Gear ratio	Rated Load Torque	Max Torque	Dimension L	Efficiency
	mN · m	mN · m		
1/10	89	245	20.5	86
1/25	196	490	23	80
1/30	196	490	23	80
1/60	294	735	25	75
1/75	294	735	25	75
1/100	294	735	25	75
1/120	294	735	25	75


■ 3 Phase outer rotor type DC Brushless Motor

BLDC motor : BKL4 Type



- Interface
 - Power Supply
 - GND
 - FG
 - BRK
 - PWM
 - CW / CCW switch
- Connection Connector
 - JST :
 - BM06B-NSHSS-TBT

※ Adjustable by winding

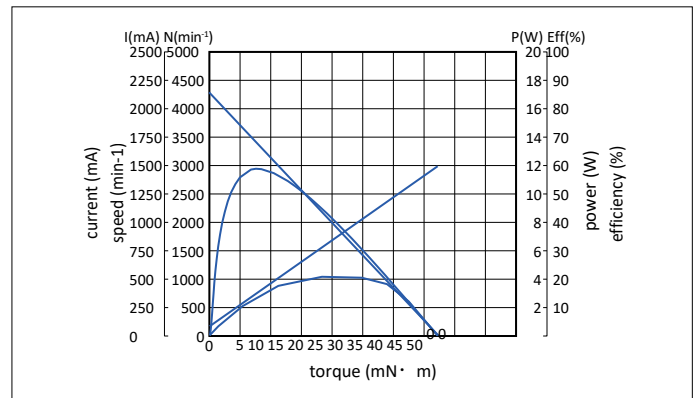

Outside Dimension (Reference)

