

# Minebea DNQ06MF

( Fe Mg )

## Characteristic

- Motor Type  
3 Phase DC Brushless Motor
- Direction of Rotation  
CW and CCW
- Control-Driver circuit built-in.
- Compact, Light Weight and High Output
- High Efficiency
- Low Noise
- Overcurrent and Locked Rotor Protection


No Plate No Cover



- $\Phi 57 \times L33$
- DC Brushless motor outer rotor type

## Major Characteristic Parameters

	Min.	Nom.	Max.	Units
Operating Voltage	21.6	24	26.4	VDC
Operating Speed	300	1000	3000	min <sup>-1</sup>
Continuous Rating Power		5	11	W
Rotor Inertia ( Reference Value )		480		g · cm <sup>2</sup>
Operating Temperature	0		50	°C
Operating Humidity	15		90	%RH
Motor Weight		250		g

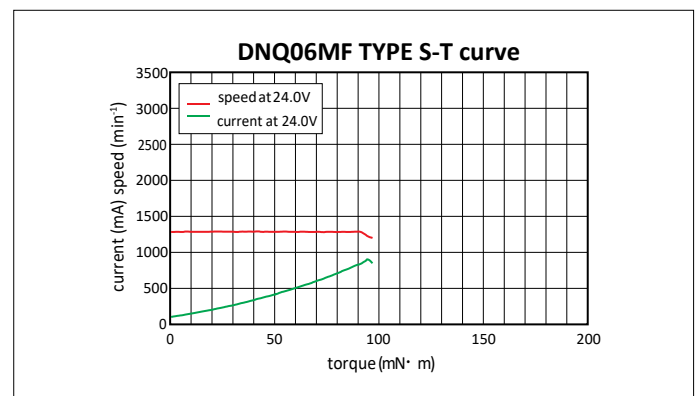

## Outside Dimension (Reference)

