


MW3827&MMS201 I2C Address Writer Users Manual Rev.0

2020.08.18
MITSUMI ELECTRIC CO., LTD.

I2C Address Writer Window

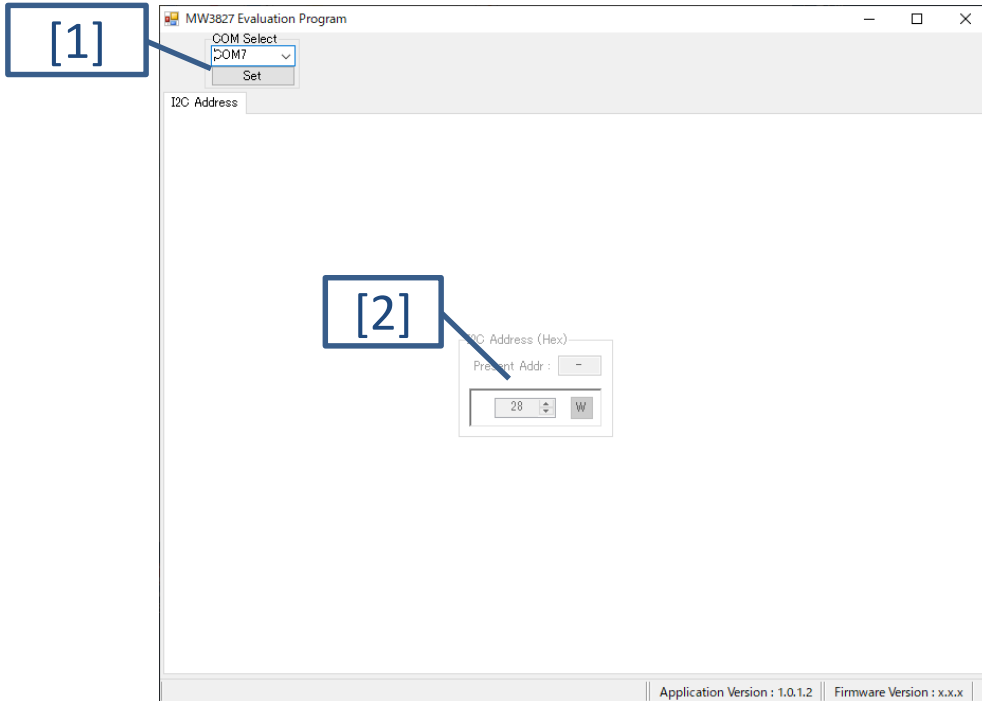


[1] COM Select



A COM port can be selected from the pull-down menu. Clicking [Set] button will start communication via the selected COM port.

[2] I2C Address

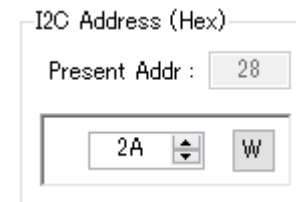

[Present Addr]

Setting a COM port displays the current I2C Address of the device. (Hexadecimal)

[W]

Clicking [W] button will rewrite to specified I2C address (Hexadecimal).

Present Addr is updated when rewriting is successful.