

## Features

1. Applicable to automotive antennas for radio frequency signal transmission.
2. Include a die casting body (shell) that can contribute to the robust structure.
3. Selectable variations of mounting requirements. (Right angle / Straight / Standard / Low height)
4. Each coding (mating key) is available.
5. Compatible with Pin-in-Paste.
6. Compliant with RoHS Directive.

## CDM-K06W



## Specifications

### Electrical Characteristics

Rated Voltage	60V DC max.
Rated Current	1A DC max.
Characteristic Impedance	50Ω
Insertion Loss	0.15dB max. (0 to 1GHz) 0.25dB max. (1 to 2.5GHz) 0.35dB max. (2.5 to 4GHz)
Return Loss	15.6dB min. (0 to 2GHz) 14.0dB min. (2 to 4GHz)

### Mechanical Characteristics

Life (Mating Cycle)	25 times
Total Insertion Force	≤50N
Total Withdrawal Force	≤50N

## Material & Finish

Component Parts		Material	Finish
CDM-K06W Long molded dual type	Contact Pin	Copper alloy	Gold plating
	Housing	LCP resin	Natural
	Shell	Zinc alloy	Ni plating
	Plate	Copper alloy	Sn plating
	Holder	Steel	Ni plating
	Cover	Thermoplastic resin	Color: depend on each work item

- Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.
- The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.


# FAKRA Connector (Long molded dual type)

## CDM-K06W / R41-A766



### Dimensions

#### CDM-K06W

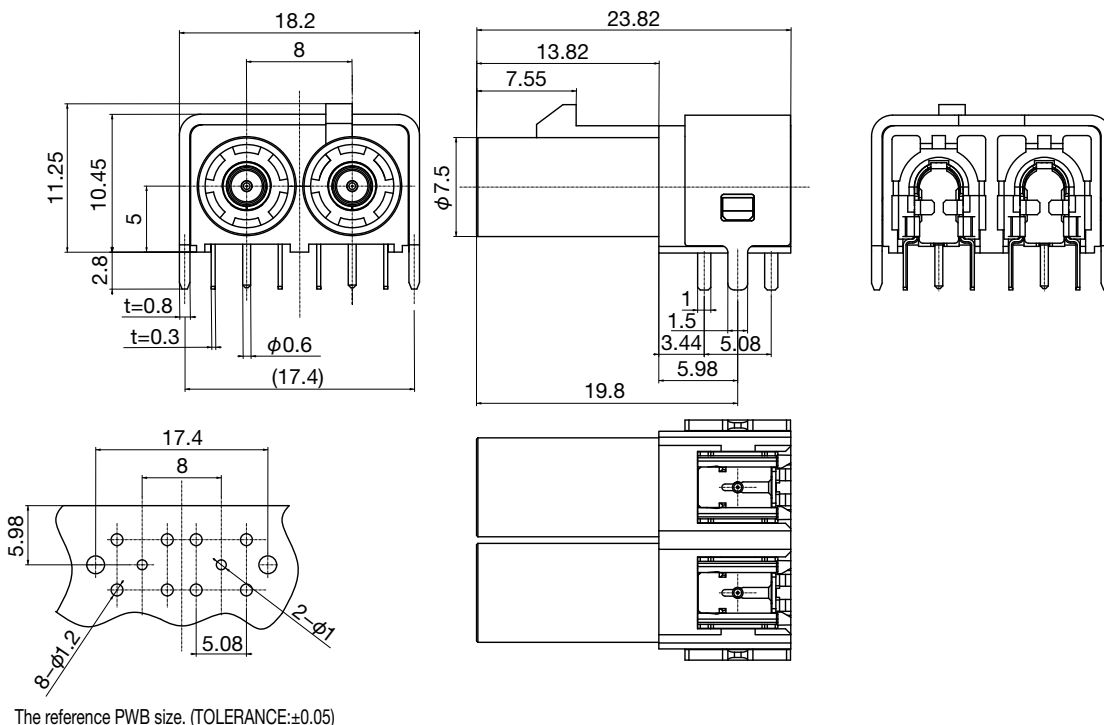

The reference PWB size. (TOLERANCE:±0.05)

Unit: mm

- Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.
- The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.